



INTER BOAT MARINAS

# System Interfloat




The Interfloat 2500 concrete pontoon is designed for marinas and commercial applications where high bearing capacity is needed. The construction is very strong and practically maintenance free ensuring a long service life, of at least 40 years. The pontoon features a profiled deck surface providing functional non slip properties and an attractive finish. The Interfloat 2500 can be moored either by piles or sinkers and is designed for economic freight and installation.



**INTER BOAT MARINAS**  
Prins Bernhardlaan 1  
NL-3297 CB PUTTERSHOEK

**T** +31 (0)78 67 77 000  
**F** +31 (0)78 67 77 009

**E** [info@interboatmarinas.nl](mailto:info@interboatmarinas.nl)  
**I** [www.interboatmarinas.nl](http://www.interboatmarinas.nl)

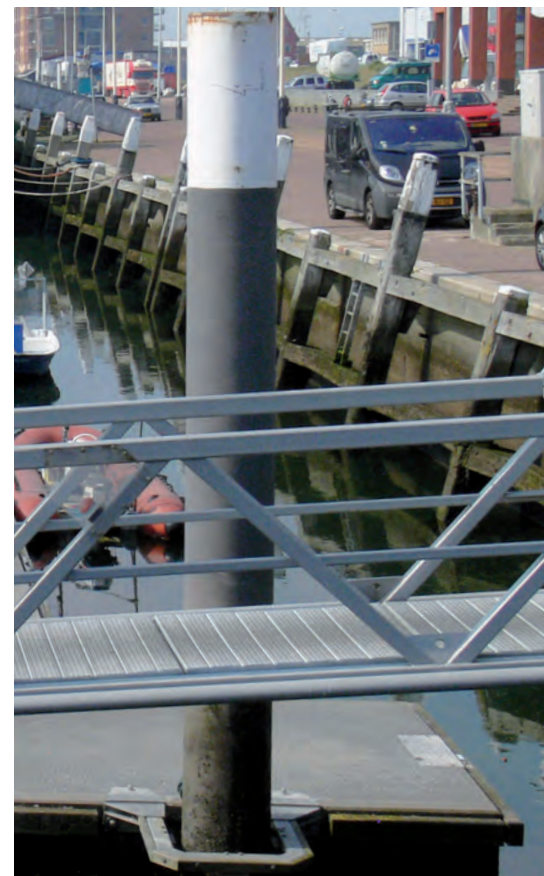

## Technical information

### Standard

|                    |  |
|--------------------|--|
| Concrete           | : 40 N/mm <sup>2</sup> watertight                      |
| Connection         | : Semi flexibel  |
| Reinforcement      | : Welded mesh reinforcement and steel parts            |
| Wall               | : Minimum 70 mm concrete                               |
| Core               | : Expanded Polystyrene density 15 kg/m <sup>3</sup>    |
| Lifting facilities | : 4 no. 24mm sockets                                   |
| Assembling rail    | : For fastening fenders, pile guides and fingers       |
| Freeboard          | : ± 0,45 meter   |
| Bearing capacity   | : ± 450 kg/m <sup>2</sup> over the full concrete width |

### Options

|               |  |
|---------------|--|
| Fenders       | : Hardwood 95 x 145 mm, 10 mm free from concrete |
| Service ducts | : "cast-in" PVC tube Ø 125 mm                    |
| Pile guides   | : With artificial impact muffled buffers         |
| Reinforcement | : Reinforced with hot-dip galvanized steel       |
| Colours       | : Grey, Other colours available on request       |

### Measures

#### Type 2512

|        |  |
|--------|--|
| Length | : 11,96 m  |
| Width  | : 2,35 m (Concrete width)<br>2,52 m (With fenders) |
| Height | : 0,88 m   |
| Weight | : ± 11.000 kg                                      |

#### Type 2509 - (only as infill piece)

|        |  |
|--------|--|
| Length | : 8,96 m   |
| Width  | : 2,35 m (Concrete width)<br>2,52 m (With fenders) |
| Height | : 0,94 m   |
| Weight | : ± 9.500 kg                                       |

#### Type 2506 - (only as infill piece)

|        |  |
|--------|--|
| Length | : 5,96 m   |
| Width  | : 2,35 m (Concrete width)<br>2,52 m (With fenders) |
| Height | : 0,94 m   |
| Weight | : ± 6.300 kg                                       |